



# SKYA21001: 20 MHz to 3.0 GHz SPDT Switch

## Automotive Applications

- Infotainment
- Automated toll systems
- Garage door openers
- 802.11 b/g/n WLAN, Bluetooth® systems
- Wireless control systems
- Outdoor lighting controls
- Remote keyless entry systems
- Telematics
- GPS/Navigation

## Features

- IP1dB = +30 dBm typical @ 3 V
- IP3 = +43 dBm typical @ 3 V
- Low insertion loss: 0.3 dB @ 0.9 GHz
- Low DC power consumption
- Ultra-miniature, SC-70 (6-pin, 2.00 x 1.25 mm) package
- AEC-Q100 qualified
- JEDEC (JESD22) qualified at 25 °C
- Lead (Pb)-free and RoHS-compliant
- (MSL-1 @ 260 °C per JEDEC J-STD-020)

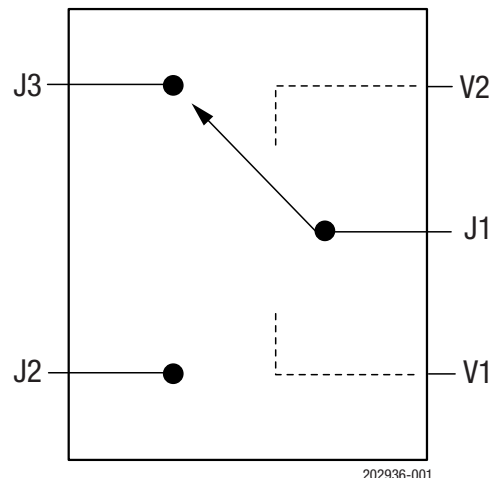


Figure 1. SKYA21001 Block Diagram

## Description

The SKYA21001 is a single-pole, double-throw (SPDT) switch. The device features low insertion loss and positive voltage operation with very low DC power consumption. The SKYA21001 is manufactured in a compact 2.00 x 1.25 mm, 6-pin SC-70 package.

A functional block diagram is shown in Figure 1. The pin configuration and package are shown in Figure 2. Signal pin assignments and functional pin descriptions are provided in Table 1.



Skyworks Green™ products are compliant with all applicable legislation and are halogen-free. For additional information, refer to *Skyworks Definition of Green™*, document number SQ04-0074.

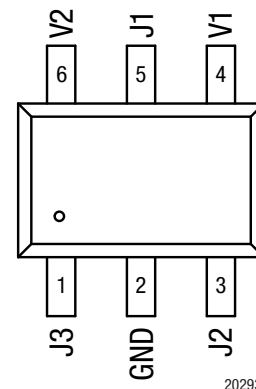


Figure 2. SKYA21001 Pinout (Top View)

**Table 1: SKYA21001 Signal Descriptions**

Pin	Name	Description	Pin	Name	Description
1	J3	RF output <sup>1</sup>	4	V1	DC control voltage
2	GND	Ground	5	J1	RF output <sup>1</sup>
3	J2	RF output <sup>1</sup>	6	V2	DC control voltage

<sup>1</sup>A 100 pF blocking capacitor is required for >500 MHz operation. Use larger value capacitors for lower frequency operation.

## Electrical and Mechanical Specifications

The absolute maximum ratings of the SKYA21001 are provided in Table 2. The electrical specifications of the SKYA21001 are provided in Table 3.

Typical performance characteristics are shown in Figures 3 and 4. The truth table is shown in Table 4.

**Table 2: SKYA21001 Absolute Maximum Ratings<sup>1</sup>**

Parameter	Symbol	Minimum	Maximum	Units
Control voltage	VCTL	-0.2	+8.0	V
RF input power (VCTL = 0 to 7 V):				
>500 MHz			+36	dBm
<500 MHz			+27	dBm
Operating temperature	TOP	-40	+105	°C
Storage temperature	TSTG	-65	+150	°C
Electrostatic discharge:				
Human Body Model (HBM), Class 1A	ESD		250	V
Charged Device Model (CDM), Class C3			1000	

<sup>1</sup>Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value.

**ESD HANDLING:** Industry-standard ESD handling precautions must be adhered to at all times to avoid damage to this device.

Table 3: SKYA21001 Electrical Specifications<sup>1</sup>

(VCTL = 0 to 3 V, TOP = +25 °C, Characteristic Impedance = 50 Ω, Unless Otherwise Noted)						
Parameter	Symbol	Test Condition	Min	Typical	Max	Units
Insertion loss <sup>2,3</sup>	IL	0.7 to 1.0 GHz, 25°C 1.0 to 2.0 GHz, 25°C 2.0 to 3.0 GHz, 25°C		0.3 0.4 0.4	0.4 0.5 0.6	dB
Insertion loss (ETC) <sup>4</sup>	IL	0.7 to 1.0 GHz, -40°C to 105 °C 1.0 to 2.0 GHz, -40°C to 105 °C 2.0 to 3.0 GHz, -40°C to 105 °C		0.35 0.41 0.46	0.45 0.55 0.7	dB
Isolation <sup>3</sup>	ISO	0.7 to 1.0 GHz, 25°C 1.0 to 2.0 GHz, 25°C 2.0 to 3.0 GHz, 25°C	22 22 20	25 25 23		dB
Isolation (ETC) <sup>4</sup>	ISO	0.7 to 1.0 GHz, -40°C to 105 °C 1.0 to 2.0 GHz, -40°C to 105 °C 2.0 to 3.0 GHz, -40°C to 105 °C	22 22 20	24 23.5 23		dB
Voltage standing wave ratio	VSWR	0.7 to 1.0 GHz, 25°C 1.0 to 2.0 GHz, 25°C 2.0 to 3.0 GHz, 25°C		1.2:1 1.2:1 1.3:1	1.4:1 1.4:1 1.45:1	
Voltage standing wave ratio (ETC) <sup>4</sup>	VSWR	0.7 to 1.0 GHz, -40°C to 105 °C 1.0 to 2.0 GHz, -40°C to 105 °C 2.0 to 3.0 GHz, -40°C to 105 °C		1.2:1 1.2:1 1.3:1	1.4:1 1.4:1 1.45:1	
Switching characteristics: Rise/fall On/off Video feedthrough	T <sub>SW</sub> T <sub>ON</sub>	10/90% or 90/10% RF, 25°C 50% control to 90/10% RF, 25°C bandwidth = 500 MHz, 25°C		90 125 25	180 250	ns ns mV
Switching characteristics (ETC) <sup>4</sup> Rise/fall (ETC) On/off (ETC)	T <sub>SW</sub> T <sub>ON</sub>	10/90% or 90/10% RF, -40°C to 105 °C 50% control to 90/10% RF, -40°C to 105 °C		90 150	180 250	ns
1 dB input compression point	IP1dB	0.7 to 3.0 GHz: V <sub>CTL</sub> = 0 to 2 V, 25°C V <sub>CTL</sub> = 0 to 3 V, 25°C V <sub>CTL</sub> = 0 to 5 V, 25°C	+23 +28 +31	+25 +30 +34		dBm
1 dB input compression point (ETC) <sup>4</sup>	IP1dB	0.7 to 3.0 GHz: V <sub>CTL</sub> = 0 to 2 V, 25°C V <sub>CTL</sub> = 0 to 3 V, 25°C V <sub>CTL</sub> = 0 to 5 V, 25°C	+18 +23 +26	+20 +26 +30		dBm
Third order intercept point	IP3	+5 dBm two-tone input power @ 0.7 to 3.0 GHz: V <sub>CTL</sub> = 0 to 2 V, 25°C V <sub>CTL</sub> = 0 to 3 V, 25°C V <sub>CTL</sub> = 0 to 5 V, 25°C	+36 +42 +44	+49 +52 +53		dBm
Third order intercept point (ETC) <sup>4</sup>	IP3	V <sub>CTL</sub> = 0 to 2 V, -40°C to 105 °C V <sub>CTL</sub> = 0 to 3 V, -40°C to 105 °C V <sub>CTL</sub> = 0 to 5 V, -40°C to 105 °C	+35 +39 +41	+49 +50 +51		dBm
Control voltage: Low (@ 20 μA max) High (@100 μA max) High (@ 200 μA max)	V <sub>CTL_L</sub> V <sub>CTL_H</sub> V <sub>CTL_H</sub>		0		0.2 2.0 5.0	V

<sup>1</sup>Performance is guaranteed only under the conditions listed in this table.  
<sup>2</sup>Insertion loss changes by 0.003 dB/±C.  
<sup>3</sup>Insertion loss state.  
<sup>4</sup>ETC = Extreme Test Conditions (V<sub>CTL</sub> = 0 to 5 V, T<sub>OP</sub> = -40 °C to +105 °C).

### Typical Performance Characteristics

(VCTL = 0 to 3 V, TOP = +25 C, PIN = 0 dBm, Characteristic Impedance [Zo] = 50 Ω, CBL = 100 pF, Unless Otherwise Noted)

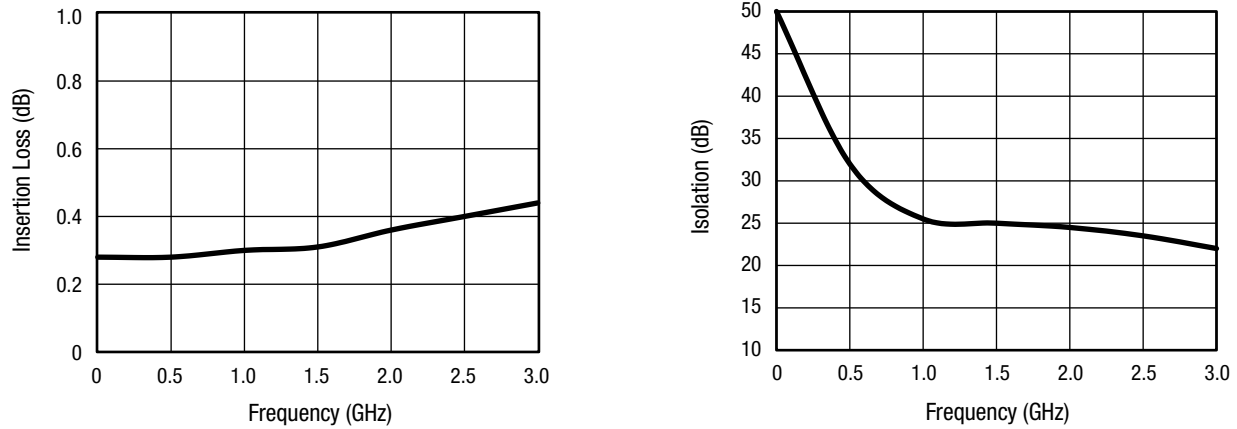


Figure 3. Left: Insertion Loss vs Frequency Right: Isolation vs Frequency

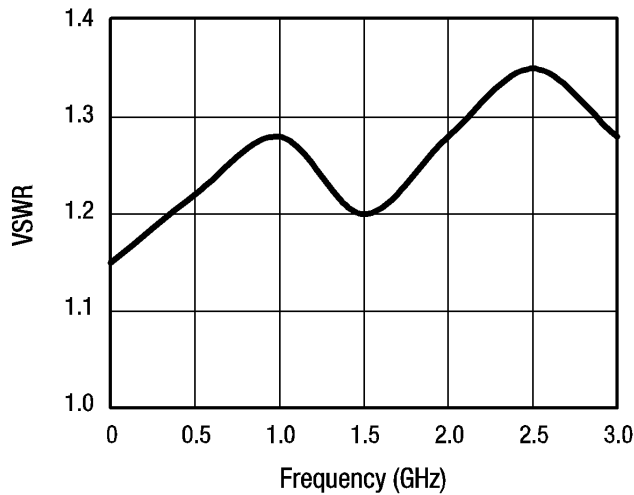


Figure 4. VSWR vs Frequency


Table 4: Truth Table (VHIGH = 2.0 to 5.0 V, VLOW = -0.2 to +0.2 V)<sup>1</sup>

V1	V2	J1-J2	J1-J3
VHIGH	VLOW	Isolation	Insertion loss
VLOW	VHIGH	Insertion loss	Isolation

<sup>1</sup>Any state other than described in this table places the device in an undefined state. An undefined state does not damage the device.

### Evaluation Board Description

The SKYA21001 Evaluation Board is used to test the performance of the SKYA21001 SPDT switch. An Evaluation Board schematic diagram is provided in Figure 5. An assembly drawing for the Evaluation Board is shown in Figure 6.

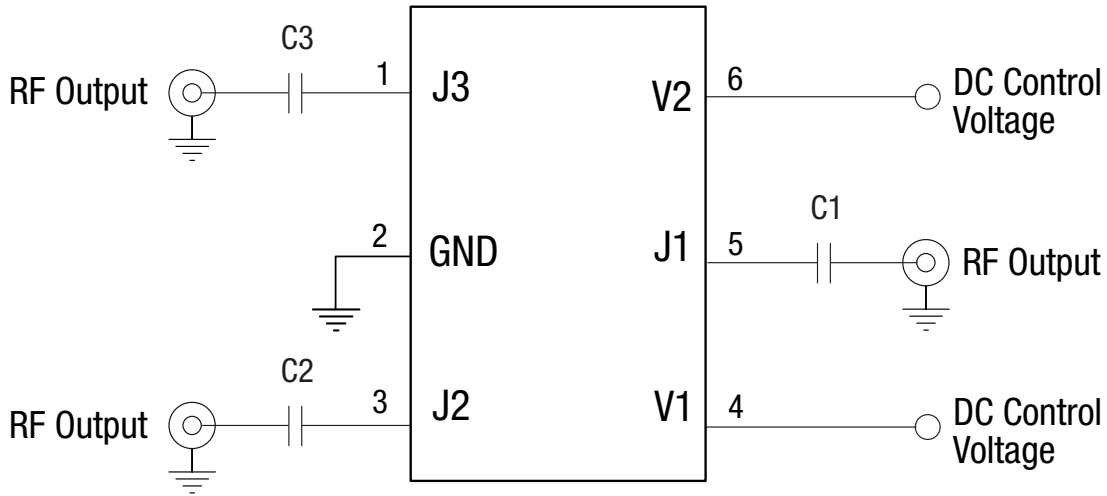

Note: Use 100 pF blocking capacitors (C1, C2, C3) for >500 MHz operation. Higher values recommended for lower frequency operation. Exposed paddle must be grounded.

Use 10 nF blocking capacitors (C1, C2, C3) for <50 MHz operation.

S2108

Figure 5. SKYA21001 Evaluation Board Schematic

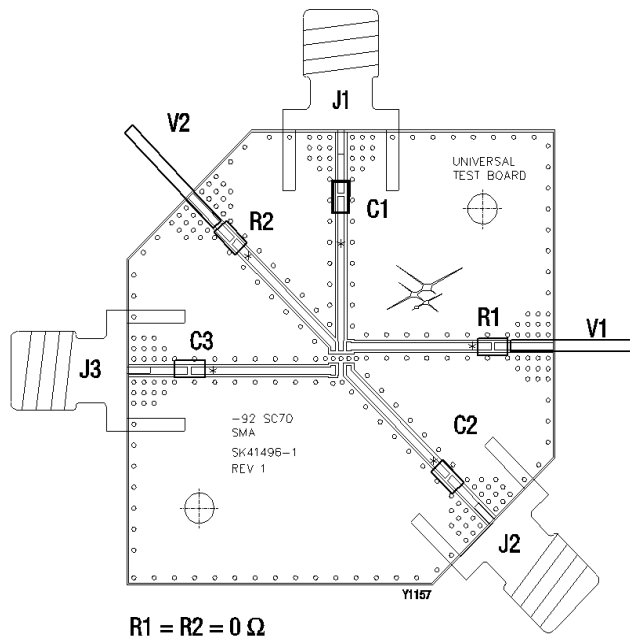



Figure 6. SKYA21001 Evaluation Board Assembly Diagram

### Package Dimensions

The PCB layout footprint for the SKYA21001 is shown in Figure 7. Package dimensions are shown in Figure 8, and tape and reel dimensions are provided in Figure 9.


### Package and Handling Information

Instructions on the shipping container label regarding exposure to moisture after the container seal is broken must be followed. Otherwise, problems related to moisture absorption may occur when the part is subjected to high temperature during solder assembly. The SKYA21001 is rated to Moisture Sensitivity Level 1 (MSL1) at 260 °C. It can be used for lead or lead-free soldering. Care must be taken when attaching this product, whether it is done manually or in a production solder reflow environment. Production quantities of this product are shipped in a standard tape and reel format.

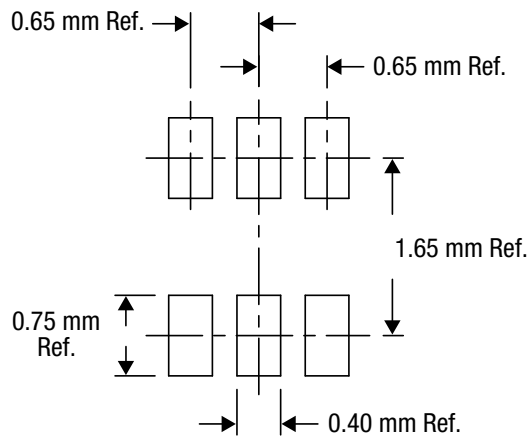

202936-008

Figure 7. SKYA21001 PCB Layout Footprint

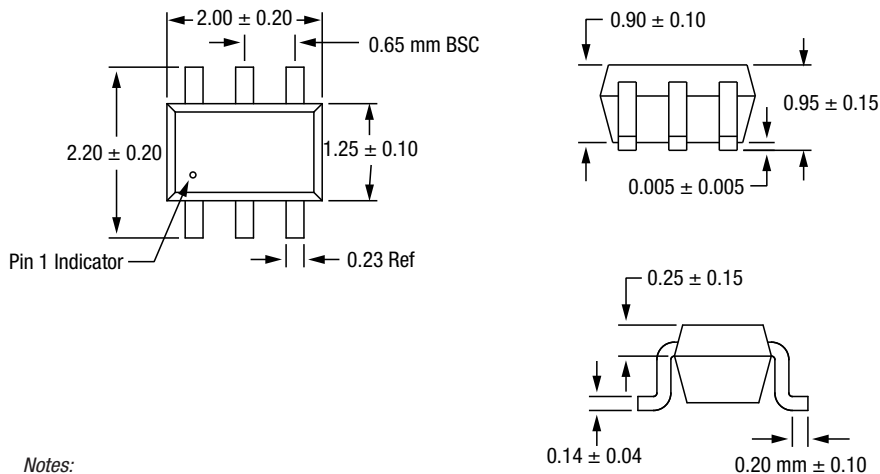


Notes:

1. All measurements are in millimeters.
2. Dimensions and tolerances according to ASME Y14.5M-1994.

202936-009

Figure 8. SKYA21001 Package Dimensions

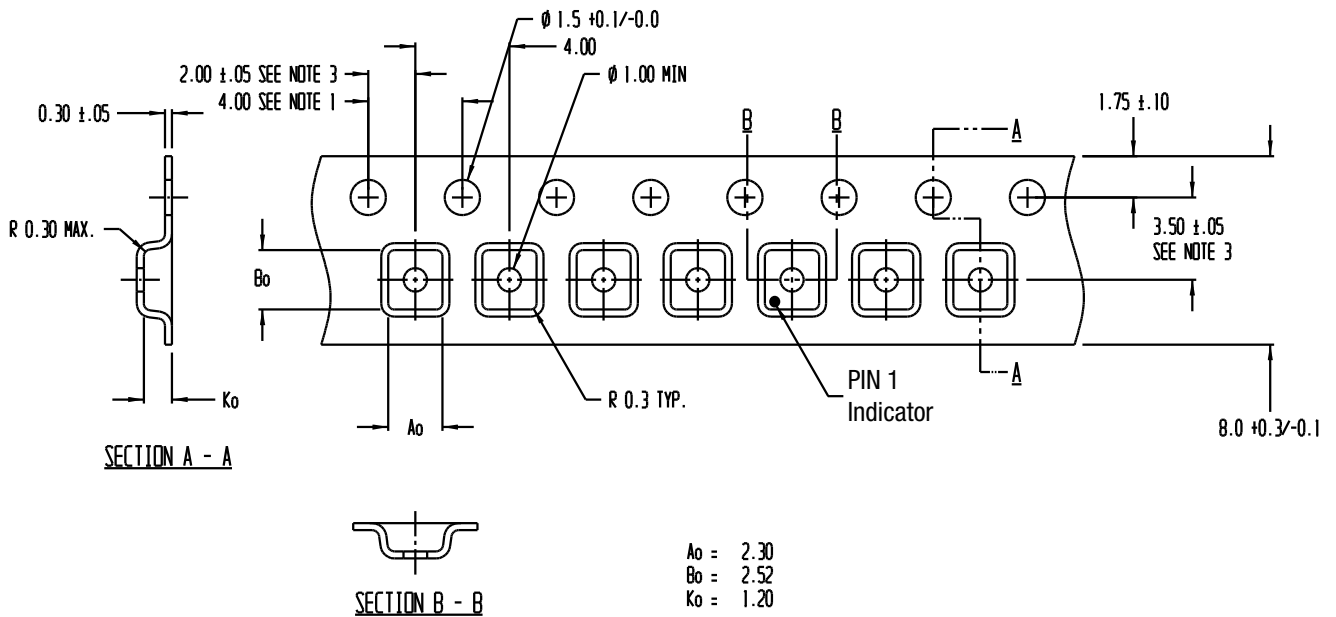

- NOTES:
1. TO SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2$
  2. CAMBER IN COMPLIANCE WITH EIA 481
  3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
  4. Ao AND Bo ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

202936-009

Figure 9. SKYA21001 Tape and Reel Dimensions

## Ordering Information

Part Number	Part Description	Evaluation Board Part Number
SKYA21001	20 MHz to 3.0 GHz SPDT Switch	SKYA21001-EVB

Copyright © 2013-2015, 2017-2018, 2022 Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. ("Skyworks") products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks' Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of Skyworks' published specifications or parameters.

Skyworks, the Skyworks symbol, Sky5®, SkyOne®, SkyBlue™, Skyworks Green™, ClockBuilder®, DSPLL®, ISOModem®, ProSLIC®, and SiPHY® are trademarks or registered trademarks of Skyworks Solutions, Inc. or its subsidiaries in the United States and other countries. Third-party brands and names are for identification purposes only and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at [www.skyworksin.com](http://www.skyworksin.com), are incorporated by reference.